

# dedolight®

PRECISION LIGHTING INSTRUMENTS



# LED DRAMA®

Brand New

# LED DRAMA<sup>®</sup>

## LED DRAMA LED Light Head

### Technical Data: LEDRAMA-D /-BI

Input	90-264 V AC / 28 V DC
Power Consumption	222 W
CCT	5600K (D), 3000K - 5600K (BI)
Beamangle	45°
Weight	19kg (+2kg PO)



### Photometrics: LEDRAMA-D

CRI Ra (1-8): >93		CRI Re (1-15):>90				TLCI: 96
Distance	Meter	1	2	3	5	6
	Feet	3.3'	6.6'	9.8'	16.4'	32.8'
Intensity	Lux	23.600	5.900	2.622	944	700
	Foot - Candle	2.193	548	244	88	61

### Photometrics: LEDRAMA-BI

CRI Ra (1-8): >93		CRI Re (1-15):>90				TLCI: 93
Distance	Meter	1	2	3	5	6
	Feet	3.3'	6.6'	9.8'	16.4'	32.8'
Intensity D	Lux	20.800	5.200	2.311	832	578
	Foot - Candle	1.932	483	215	77	54
Intensity T	Lux	17.000	4.250	1.889	680	472
	Foot - Candle	1.579	395	175	63	44

DATA SHEET 09/14

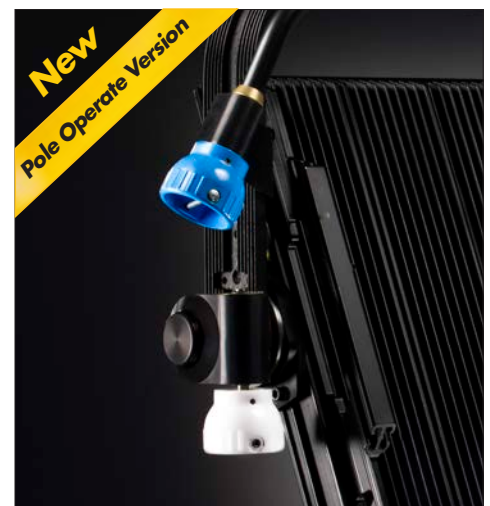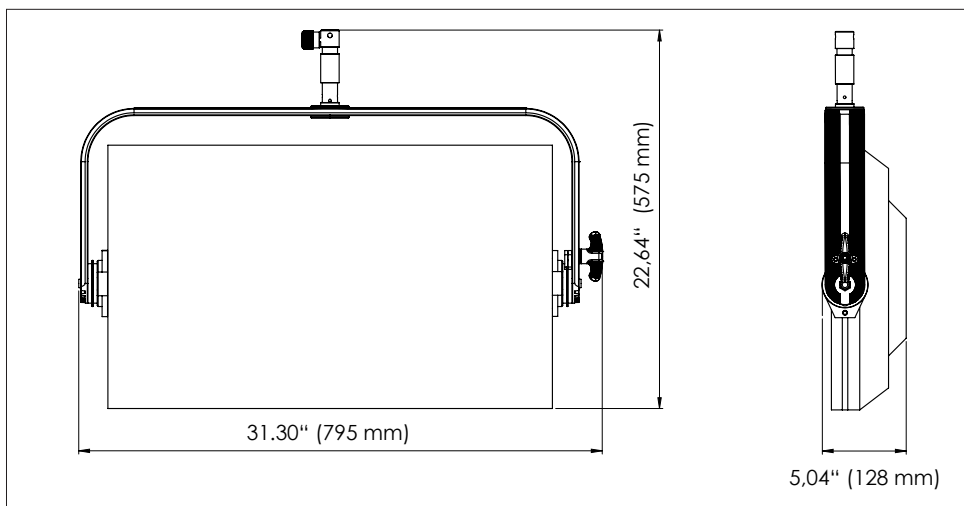

Accessories: Filter holder, Diffusor, Honeycomb, Studio Ballast, IP Ballast

– all specifications subject to change with out prior notice –



**Dedo Weigert Film GmbH**

Karl-Weinmair-Straße 10  
D-80807 Munich, Germany

Phone: +49 - (0)89 - 356 16 01  
Fax: +49 - (0)89 - 356 60 86

info@dedoweigertfilm.de  
www.dedoweigertfilm.de